

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

NI-5751

DEVICE SPECIFICATIONS

NI 5751/5751B

50 MS/s Digitizer Adapter Module

This document lists specifications for the NI 5751/5751B adapter module. Pair these specifications with the specifications listed in your FlexRIO FPGA specifications document or your controller for FlexRIO specifications document.

Maximum and *minimum* specifications are warranted not to exceed these values within certain operating conditions and include the effects of temperature and uncertainty unless otherwise noted.

Characteristic specifications are unwarranted values that are representative of an average unit operating at room temperature

Typical specifications are unwarranted values that are representative of a majority (90%) of units within certain operating conditions and include the effects of temperature and uncertainty unless otherwise noted.



Note Using the NI 5751/5751B in a manner not described in this document may impair the protection that the NI 5751/5751B provides.



Caution To avoid permanent damage to the NI 5751/5751B, disconnect all signals connected to the NI 5751/5751B before powering down the module, and only connect signals after the module has been powered on by the FlexRIO FPGA module or the controller for FlexRIO.



Note These specifications are characteristic at 25 °C unless otherwise noted.

Specifications are subject to change without notice. For the most recent device specifications, visit ni.com/manuals.

Contents

FlexRIO Documentation.....	2
Absolute Maximum Ratings.....	4
Analog Input (AI 0 to AI 15).....	4
General Characteristics.....	4
Specific Characteristics.....	5
Sample Clock.....	7
CLK IN.....	7
General Characteristics.....	7
Digital Input Terminals.....	8
General Characteristics.....	8

Digital Output Terminals.....8
 General Characteristics.....8
Power.....8
Physical.....9
Environment.....9
 Operating Environment.....9
 Storage Environment.....9
Shock and Vibration.....9
Compliance and Certifications.....10
 Safety.....10
 Electromagnetic Compatibility.....10
 CE Compliance.....11
Online Product Certification.....11
Environmental Management.....11
 Waste Electrical and Electronic Equipment (WEEE).....11
 电子信息产品污染控制管理办法（中国 RoHS）.....11

FlexRIO Documentation

Table 1. FlexRIO Documentation Locations and Descriptions

Document	Location	Description
Getting started guide for your FlexRIO FPGA module or controller for FlexRIO	Available from the Start menu and at ni.com/manuals .	Contains installation instructions for your FlexRIO system.
Specifications document for your FlexRIO FPGA module or controller for FlexRIO	Available from the Start menu and at ni.com/manuals .	Contains specifications for your FlexRIO FPGA module or controller for FlexRIO.
Getting started guide for your adapter module	Available from the Start menu and at ni.com/manuals .	Contains signal information, examples, and CLIP details for your adapter module.
Specifications document for your adapter module	Available from the Start menu and at ni.com/manuals .	Contains specifications for your adapter module.
<i>LabVIEW FPGA Module Help</i>	Embedded in <i>LabVIEW Help</i> and at ni.com/manuals .	Contains information about the basic functionality of the LabVIEW FPGA Module.

Table 1. FlexRIO Documentation Locations and Descriptions (Continued)

Document	Location	Description
<i>Real-Time Module Help</i>	Embedded in <i>LabVIEW Help</i> and at ni.com/manuals .	Contains information about real-time programming concepts, step-by-step instructions for using LabVIEW with the Real-Time Module, reference information about Real-Time Module VIs and functions, and information about LabVIEW features on real-time operating systems.
<i>FlexRIO Help</i>	Available from the Start menu and at ni.com/manuals .	Contains information about the FPGA module front panel connectors and I/O, controller for FlexRIO front panel connectors and I/O, programming instructions, and adapter module component-level IP (CLIP).
<i>FlexRIO Adapter Module Development Kit User Manual</i>	Available from the Start menu at Start»All Programs»National Instruments»NI FlexRIO»NI FlexRIO Adapter Module Development Kit»Documentation .	Contains information about how to create custom adapter modules for use with FlexRIO FPGA modules.
LabVIEW Examples	Available in NI Example Finder. In LabVIEW, click Help»Find Examples»Hardware Input and Output»FlexRIO .	Contains examples of how to run FPGA VIs and Host VIs on your device.
IPNet	Located at ni.com/ipnet .	Contains LabVIEW FPGA functions and intellectual property to share.
FlexRIO product page	Located at ni.com/flexrio .	Contains product information and data sheets for FlexRIO devices.

Absolute Maximum Ratings



Caution Stresses beyond those listed in this section may cause permanent damage to the adapter module. Avoid swapping the analog and digital cables because doing so will short the digital output terminals to ground.

(AI+, AI-)	$\pm 2\text{ V}$
External clock input	-0.5 V to 3.5 V
Digital input	-0.5 V to 3.5 V
Digital output current	2 mA

Analog Input (AI 0 to AI 15)

General Characteristics

Connector type	VHDCI
Number of channels	16 single-ended
Max input voltage swing	2 V_{pp}
Input impedance	$50\ \Omega \pm 2\%$
Coupling	DC coupled
ADC manufacturer part number	AD9252, 14-bit pipelined analog-to-digital converter



Note For additional information on the AD9252, refer to the device datasheet at www.analog.com.

Specific Characteristics

Figure 1. NI 5751 Characteristic Frequency Response


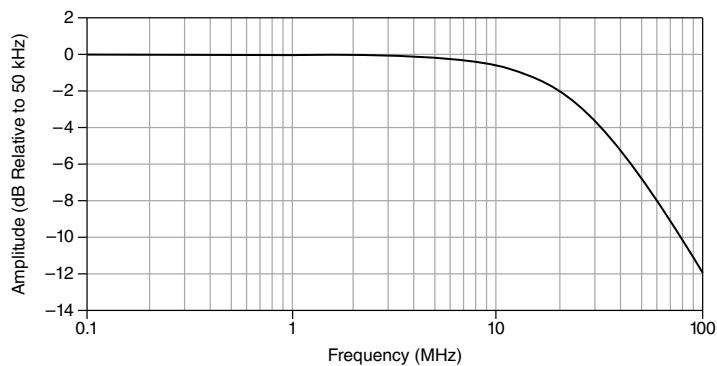


Figure 2. NI 5751 Characteristic Frequency Response

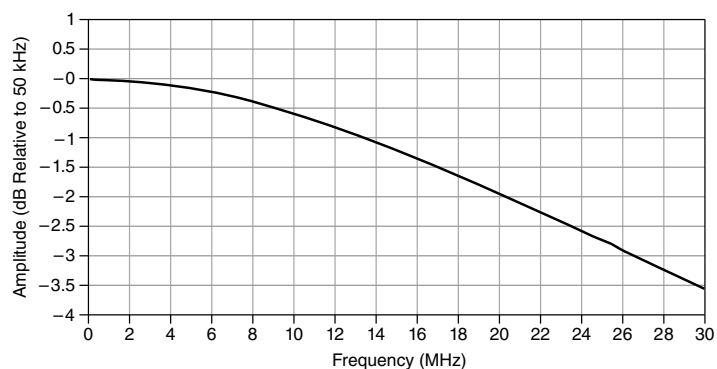

Bandwidth (-3 dB)	26 MHz
DC gain error	±2% of input
DC offset error	±2% of FS
Crosstalk ¹	
1 MHz	75 dB
5 MHz	-65 dB
Average noise density	-147 dBFS/Hz

¹ Measured on one channel with test signal applied to another channel.

Table 2. Signal Integrity

Name	Value	Input Signal	f_{in}
Signal-to-noise ratio (SNR)	71 dB	-1 dBFS	5 MHz
Spurious-free dynamic range (SFDR)	73 dB	-1 dBFS	5 MHz
Total harmonic distortion (THD)	73 dB	-1 dBFS	5 MHz

Figure 3. NI 5751 Characteristic Dynamic Performance, Spectrum-64 k Samples, 5.3 MHz, -1 dBFS Input Signal


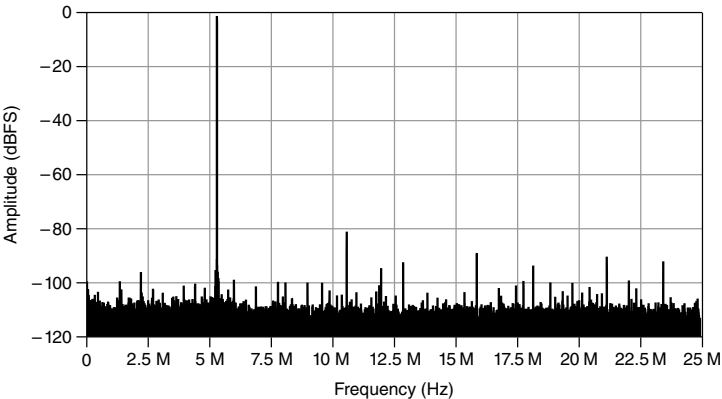


Figure 4. NI 5751 Characteristic Noise Density, Spectrum-64 k Samples

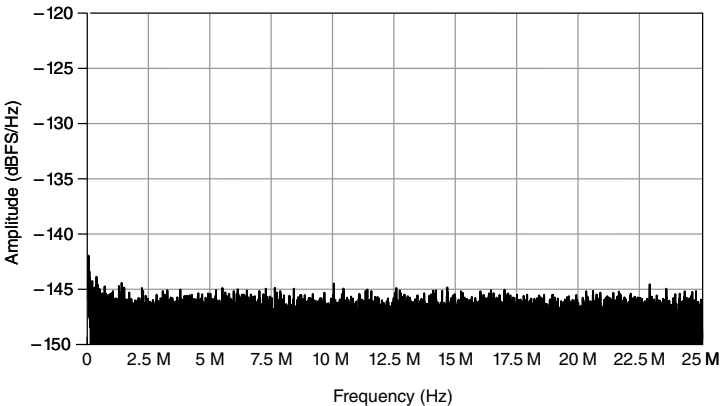

Sample Clock

Sample Clock sources	50 MHz onboard clock, Sync Clock (PXIe_DSTARA) ^{2,3} , or CLK IN ⁴ (front panel SMB)
Sample Clock frequency range	30 MHz to 50 MHz ⁵

CLK IN

Connector	SMB
Logic level	3.3 V CMOS
Minimum high-level input voltage (V _{IH})	2.2 V
Maximum low-level input voltage (V _{IL})	0.6 V
Input impedance	> 50 kΩ
Input coupling	DC
Duty cycle	45% to 55%

General Characteristics

Connector	SMB
Logic Level	3.3 V CMOS
V _{IH}	2.2 V
V _{IL}	0.6 V
Input impedance	> 50 kΩ
Input coupling	DC
Duty cycle	45% to 55%

² Sync Clock (PXIe_DSTARA) is only available on NI PXI Express FlexRIO FPGA modules, such as the NI PXIe-796xR. On PXI Express modules, Sync Clock is driven by the PXIe_DSTARA signal from the PXI/PXI Express backplane. For NI PXI modules, such as the NI PXI-795xR, and controllers for FlexRIO, such as the NI-793xR, Sync Clock (PXIe_DSTARA) is not available.

³ If you change the frequency of Sync Clock (PXIe_DSTARA) or CLK IN (when used as the Sample Clock), you must assert ForceInit.

⁴ If you change the frequency of Sync Clock (PXIe_DSTARA) or CLK IN (when used as the Sample Clock), you must assert ForceInit.

⁵ If you change the frequency of Sync Clock (PXIe_DSTARA) or CLK IN (when used as the Sample Clock), you must assert ForceInit.

Digital Input Terminals

General Characteristics

Number of channels	8
Connector	VHDCI
Minimum high-level input voltage ($V_{IH}(\text{min})$)	2.0 V
Maximum low-level input voltage ($V_{IL}(\text{max})$)	0.8 V

Digital Output Terminals

General Characteristics

Number of channels	8
Connector	VHDCI
Minimum high-level output voltage ($V_{OH}(\text{min})$)	2.4 V
Maximum low-level output voltage ($V_{OL}(\text{max})$)	0.55 V
Maximum output current	1 mA
Minimum pulse width	10 ns
Maximum toggle frequency	1 MHz, all outputs toggling

Power

Power requirements from the NI FlexRIO FPGA module

+12 V	200 mA, 2.4 W max
+3.3 V	900 mA, 2.97 W max
Total power	5.37 W

Physical

Dimensions	12.9 × 2.0 × 12.1 cm (5.1 × 0.8 × 4.7 in.)
Weight	284 g (10 oz)
Front panel connectors	One SMB connector and three 68-pin VHDCI connectors

Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Storage Environment

Ambient temperature range	-20 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
-----------------	--

Random vibration

Operating	5 Hz to 500 Hz, 0.3 g _{rms}
Nonoperating	5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2015 National Instruments. All rights reserved.