

## COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash    Get Credit    Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



*Bridging the gap between the manufacturer and your legacy test system.*

 1-800-915-6216

 [www.apexwaves.com](http://www.apexwaves.com)

 [sales@apexwaves.com](mailto:sales@apexwaves.com)

*All trademarks, brands, and brand names are the property of their respective owners.*

**Request a Quote**

 **CLICK HERE**

**PXI-2595**

## DEVICE SPECIFICATIONS

# NI PXI-2595

## 5 GHz 4x1 50 $\Omega$ Multiplexer

This document lists specifications for the NI PXI-2595 (NI 2595). All specifications are subject to change without notice. Visit [ni.com/manuals](http://ni.com/manuals) for the most current specifications.

---

Topology	4x1 multiplexer
----------	-----------------

---

Refer to the *NI Switches Help* at [ni.com/manuals](http://ni.com/manuals) for detailed topology information.

## About These Specifications

---

*Specifications* characterize the warranted performance of the instrument under the stated operating conditions.

*Typical Specifications* are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C ambient temperature. Typical specifications are not warranted.

All voltages are specified in DC, AC<sub>pk</sub>, or a combination unless otherwise specified.



**Caution** The protection provided by the NI 2595 can be impaired if it is used in a manner not described in this document.

## Input Characteristics

---

Maximum switching voltage	30 V
---------------------------	------

---



**Note** NI recommends against switching active RF signals. As a relay actuates, the channel is momentarily unterminated. Some RF sources can be damaged by reflections if their outputs are not properly terminated. Refer to your RF source documentation for more information.

---

Maximum switching current	0.5 A
---------------------------	-------

---

Maximum carry current	0.5 A
-----------------------	-------

---

Maximum RF power	10 W
------------------	------

---



**Caution** The switching power is limited by the maximum switching current and the maximum voltage. Channel to common switching power must not exceed 10 W.



**Note** Switching active RF signals below 0 dBm may degrade signal integrity and decrease relay life. For more information about switching active RF signals, visit [ni.com/info](http://ni.com/info) and enter Info Code `RFSwitching`.

---

#### DC path resistance

Initial	<0.25 $\Omega$
End-of-life	$\geq 1.0 \Omega$

Path resistance is a combination of relay contact resistance and trace resistance. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance rises rapidly above 1.0  $\Omega$ .


## RF Performance Characteristics

---


Characteristic impedance ( $Z_0$ )	50 $\Omega$ nominal
Insertion loss	
$\leq 1$ GHz	<0.7 dB (<0.4 dB typical)
$\leq 3$ GHz	<1.7 dB (<1.0 dB typical)
$\leq 5$ GHz	<2.8 dB (<2.0 dB typical)
Voltage standing wave ratio (VSWR)	
$\leq 1$ GHz	<1.25 (<1.1 typical)
$\leq 3$ GHz	<1.40 (<1.3 typical)
$\leq 5$ GHz	<1.85 (<1.5 typical)
Isolation	
$\leq 1$ GHz	>70 dB (>78 dB typical)
$\leq 3$ GHz	>55 dB (>69 dB typical)
$\leq 5$ GHz	>30 dB (38 dB typical)
Typical channel-to-channel skew	<1 ps
Typical propagation delay	<700 ps
Typical rise time (10% to 90%)	<65 ps

Refer to the following figures for typical insertion loss, typical VSWR, and typical isolation, respectively.


**Figure 1. Typical Insertion Loss**

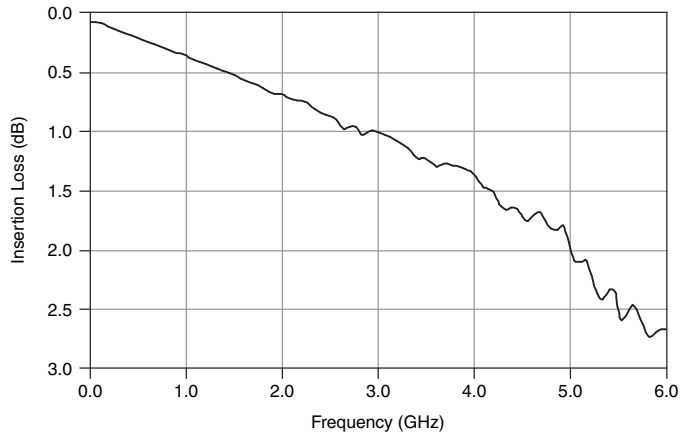

**Figure 2. Typical VSWR**

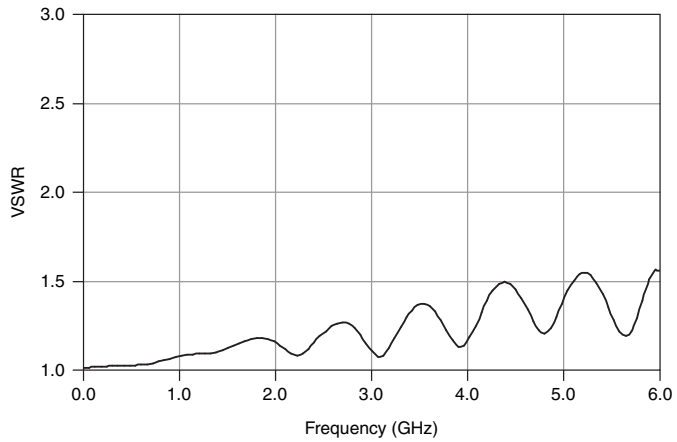

**Figure 3. Typical Isolation**

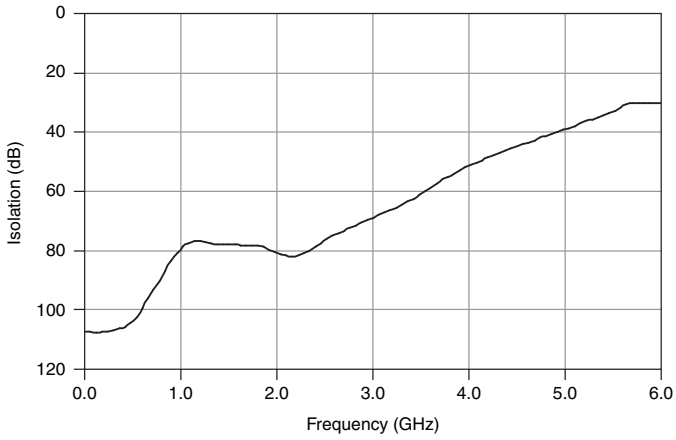

## Dynamic Characteristics

Relay operate time 10.4 ms



**Note** Certain applications may require additional time for proper settling. Refer to the *NI Switches Help* at [ni.com/manuals](http://ni.com/manuals) for more information about including additional settling time.

Expected relay life

Mechanical	$1 \times 10^6$
Electrical (30 V, 10 mA, DC resistive)	$3 \times 10^5$ cycles

# Trigger Characteristics

---

## Input trigger

Sources	PXI trigger lines <0...7>
Minimum pulse width	150 ns



**Note** The NI 2595 can recognize trigger pulse widths less than 150 ns if you disable digital filtering. Refer to the *NI Switches Help* at [ni.com/manuals](http://ni.com/manuals) for information about disabling digital filtering.

## Output trigger

Destinations	PXI trigger lines <0...7>
Pulse width	Programmable (1 $\mu$ s to 62 $\mu$ s)

# Physical Characteristics

---

Relay type	Electromechanical, latching
I/O connectors	5 SMA jacks
PXI power requirement	3 W at 5 V, 0.5 W at 3.3 V
Dimensions (L $\times$ W $\times$ H)	3U, one slot, PXI/cPCT module 21.6 $\times$ 2.0 $\times$ 13.0 cm (8.5 $\times$ 0.8 $\times$ 5.1 in.)
Weight	252 g (8.8 oz)

# Environment

---

Operating temperature	0 $^{\circ}$ C to 55 $^{\circ}$ C
Storage temperature	-20 $^{\circ}$ C to 70 $^{\circ}$ C
Relative humidity	5% to 85%, noncondensing
Pollution Degree	2
Maximum altitude	2,000 m

Indoor use only.


# Shock and Vibration

Operational Shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)
Random Vibration	
Operating	5 Hz to 500 Hz, 0.3 g <sub>rms</sub>
Nonoperating	5 Hz to 500 Hz, 2.4 g <sub>rms</sub> (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

## Diagrams


Refer to the following figure for the power-on state diagram of the NI 2595.

**Figure 4. NI 2595 Power-On State**



Refer to the following figure for the front panel connector pinout of the NI 2595.

**Figure 5.** NI 2595 Front Panel Connector Pinout

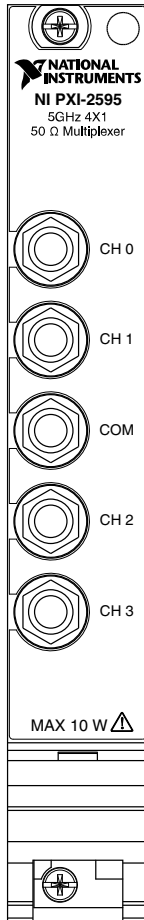

**Note** For topology-specific connection information, refer to your device in the *NI Switches Help* and the installation instructions for any associated cables or terminal blocks.

## Accessories

Refer to [ni.com](https://ni.com) for more information about the following accessories.



**Table 1.** Accessories for the NI 2595

Accessory	Length	Part Number
SMA-100	12.7 cm	763443-01
	38.1 cm	763444-01
SMA Plug (Male) to SMB Jack (Male) Adapter	—	779674-01
SMA 50 Ohm termination plug	—	778353-01
RF Torque Screwdriver and SMA Driver Bit	—	780895-01

## Compliance and Certifications

### Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

### Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

# CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

## Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit [ni.com/certification](https://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2006—2015 National Instruments. All rights reserved.