

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PXI-2529

NI PXI/PXIe-2529 Specifications

128-Crosspoint Relay Matrix

このドキュメントには、日本語ページも含まれています。

This document lists specifications for the NI PXI/PXIe-2529 (NI 2529) matrix module. All specifications are subject to change without notice. Visit ni.com/manuals for the most current specifications.

Topologies 2-wire 4 × 32 matrix
2-wire 8 × 16 matrix
2-wire dual 4 × 16 matrix

Refer to the *NI Switches Help* for detailed topology information.



Caution To ensure the specified EMC performance, operate this product only with shielded cables and accessories.



Caution Device relays might change state momentarily during electrostatic discharge.



Caution Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document at ni.com/manuals for important safety and compliance information.

About These Specifications

Specifications characterize the warranted performance of the instrument under the stated operating conditions.

Typical Specifications are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C. Typical specifications are not warranted.

Input Characteristics

All input characteristics are DC, AC_{rms}, or a combination unless otherwise specified.

Maximum switching voltage

Channel-to-channel 150 V

Channel-to-ground 150 V, CAT I



Caution This module is rated for Measurement Category I and intended to carry signal voltages no greater than 150 V. This module can withstand up to 800 V impulse voltage. Do not use this module for connection to signals or for measurements within Categories II, III, or IV. Do not connect to MAINS supply circuits (such as wall outlets) of 115 or 230 VAC. Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for more information about measurement categories.



Caution When hazardous voltages (>42.4 V_{pk}/60 VDC) are present on any relay terminal, safety low-voltage (≤42.4 V_{pk}/60 VDC) cannot be connected to any other relay terminal.



Caution The maximum switching power is limited by the maximum switching current, the maximum voltage, and must not exceed 30 W, 37.5 VA.

Maximum switching power 30 W, 37.5 VA
(per channel)

Maximum switching current 1 A
(per channel)

Maximum carry current 2 A
(per channel)

Maximum module current 8 A



Note Switching inductive loads (for example, motors and solenoids) can produce high voltage transients in excess of the module's rated voltage. Without additional protection, these transients can interfere with module operation and impact relay life. For more information about transient suppression, visit ni.com/info and enter the Info Code `induct`.

DC path resistance	
Initial	<1 Ω
End-of-life.....	$\geq 2 \Omega$

Path resistance is a combination of relay contact resistance and trace resistance and is measured as the combined resistance of the high and low signal paths from one row to one column. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance rises rapidly above 1 Ω .

Thermal EMF	<9 μV
Minimum current.....	10 μA

RF Performance Characteristics

Typical single crosspoint bandwidth

>10 MHz
(50 Ω system, one row to one column)

Typical crosstalk (50 Ω system)

10 kHz.....<-80 dB
100 kHz.....<-65 dB
1 MHz.....<-50 dB

Dynamic Characteristics

Relay operate time (at 20 $^{\circ}\text{C}$).....4 ms, maximum



Note Certain applications may require additional time for proper settling. Refer to the *NI Switches Help* for information about including additional settling time.

Release time (at 20 $^{\circ}\text{C}$).....4 ms, maximum

Expected relay life

Mechanical..... 5×10^7 cycles
Electrical

30 V, 100 mA, resistive..... 5×10^5 cycles
30 V, 1 A, resistive..... 1×10^5 cycles



Note The relays used in the NI 2529 are field replaceable. Refer to the *NI Switches Help* for information about replacing a failed relay.

Trigger Characteristics

Input trigger

Sources.....PXI trigger lines 0–7,
Front panel

Minimum pulse width.....150 ns

Front panel input voltage

Absolute minimum.....–0.5 V
 V_{IL} maximum.....+0.7 V

V_{IH} minimum	+2.0 V
V_I nominal	+3.3 V
Absolute maximum.....	+5.5 V



Note The NI 2529 can recognize trigger pulse widths that are less than 150 ns when you disable digital filtering. For information about disabling digital filtering, refer to the *NI Switches Help*.

Output trigger

Destinations.....PXI trigger lines 0–7,
Front panel

Pulse width.....Programmable
(1 μs to 62 μs)

Front panel nominal voltage.....+3.3 V TTL, 8 mA

Physical Characteristics

Relay type.....Electromechanical,
latching

Relay contact material.....Silver palladium and gold

Front panel connector.....100-pin high-density
interconnect (HDI)

Power requirement

PXI.....6 W at 5 V
2.5 W at 3.3 V

PXI Express.....7.5 W at 12 V
2.5 W at 3.3 V

Dimensions (L \times W \times H).....3U, one slot,
PXI/PCI module,
PXIe compatible
21.6 \times 2.0 \times 13.0 cm
(8.5 \times 0.8 \times 5.1 in.)

Weight.....410 g (15 oz)

Environment

Operating temperature.....0 $^{\circ}\text{C}$ to 55 $^{\circ}\text{C}$

Storage temperature.....–20 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$

Relative humidity.....5% to 85%,
noncondensing

Pollution Degree.....2

Maximum altitude.....2,000 m

Indoor use only.

Shock and Vibration

Operational Shock..... 30 g peak, half-sine,
11 ms pulse
(Tested in accordance
with IEC 60068-2-27.
Test profile developed
in accordance with
MIL-PRF-28800F.)

Random Vibration

Operating 5 to 500 Hz, 0.3 g_{rms}
Nonoperating 5 to 500 Hz, 2.4 g_{rms}
(Tested in accordance
with IEC 60068-2-64.
Nonoperating test profile
exceeds the requirements
of MIL-PRF-28800F,
Class 3.)

Accessories

Visit ni.com for more information about the following accessories.

Table 1. Accessories Available for the NI 2529

Accessory	Part Number
NI TB-2634 terminal block (4 × 32, 2-wire matrix)	778840-01
NI TB-2635 terminal block (8 × 16, 2-wire matrix)	778839-01
NI TB-2636 terminal block (4 × 32 2-wire matrix)	196762-01

Table 2. Third-Party Accessories for the NI 2529

Accessory	Manufacturer	Part Number
Mating front panel connector, vertical*	AMP	5533285-1
Mating front panel connector, right-angle*	AMP	5532903-2
* PCB mount, additional cover or enclosure required. See previous safety caution.		



Caution You *must* install mating connectors according to local safety codes and standards and according to the specifications provided by the connector manufacturer. You are responsible for verifying safety compliance of third-party connectors and their usage according to the relevant standard(s), including UL and CSA in North America and IEC and VDE in Europe.

Diagrams

Figure 1 shows the NI 2529 power-on state.

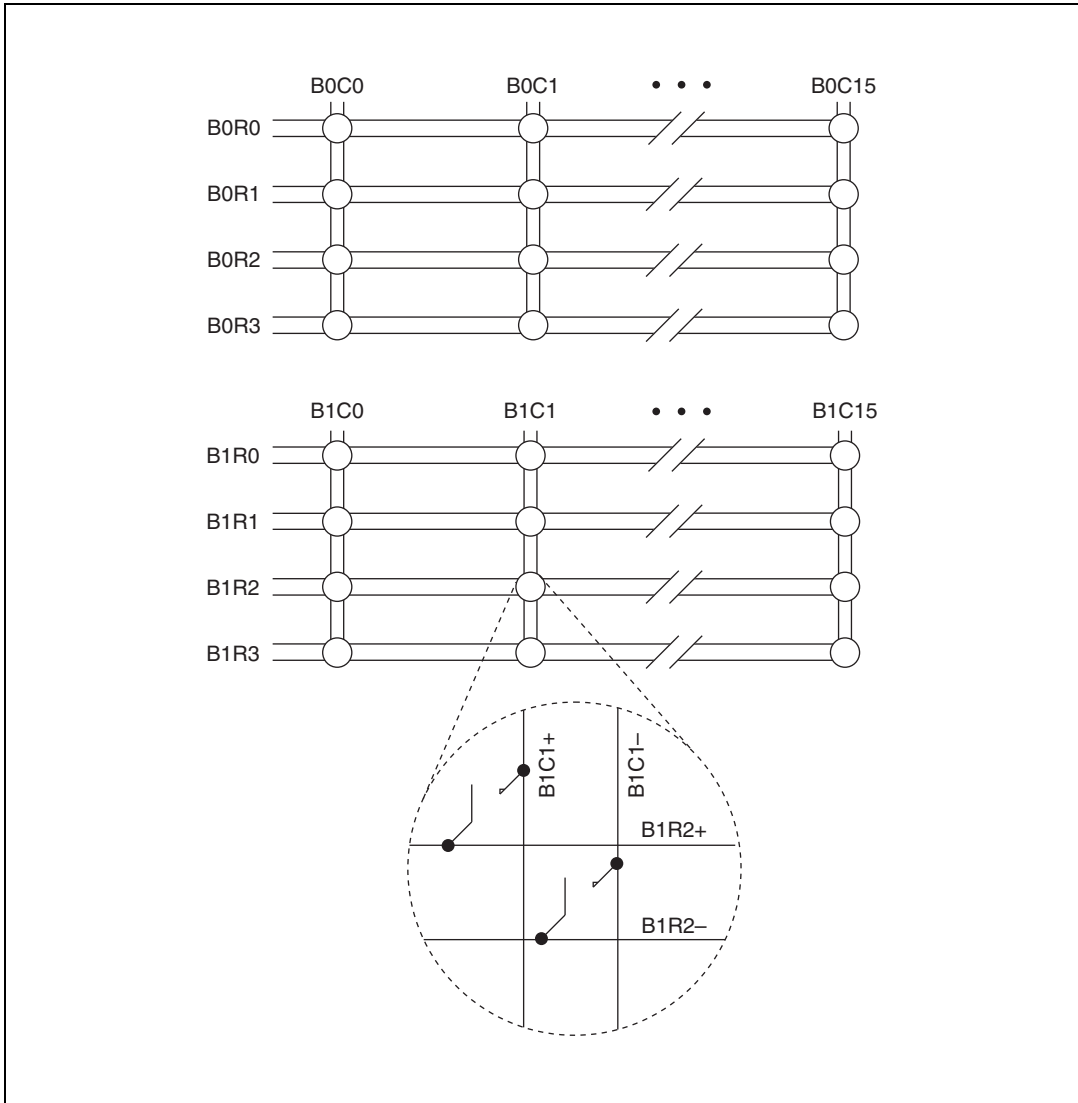


Figure 1. NI 2529 Power-On State

Figure 2 shows the NI 2529 connector pinout.

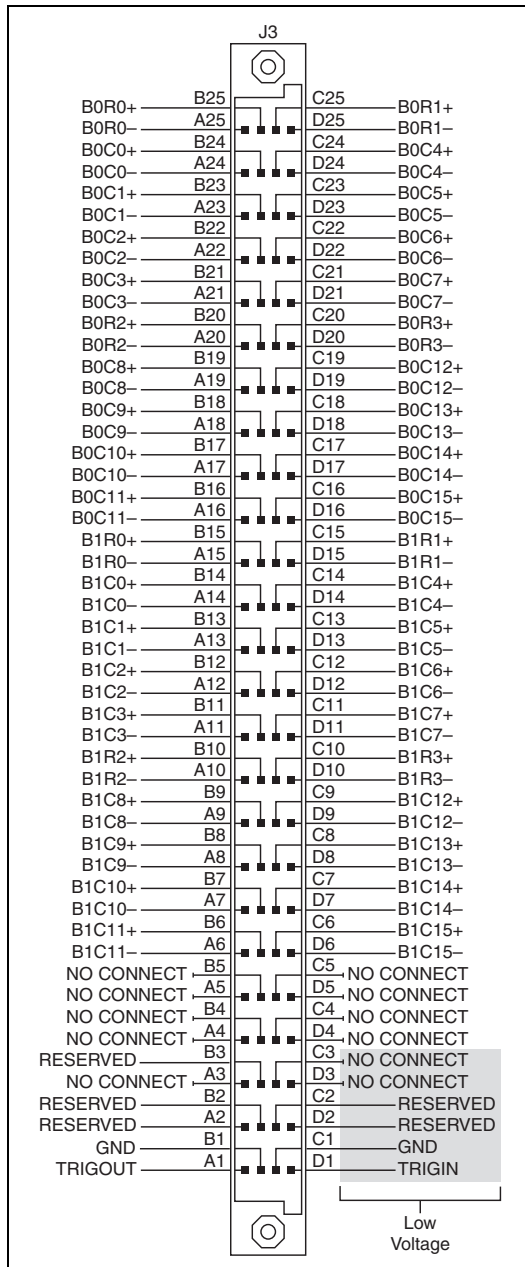


Figure 2. NI 2529 Connector Pinout



Note For topology-specific connection information, refer to your device in the *NI Switches Help* and the installation instructions for any associated cables or terminal blocks.

Compliance and Certifications

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generates radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations and certifications, refer to the [Online Product Certification](#) section. CE Compliance

CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

To obtain product certifications and the Declaration of Conformity (DoC) for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *NI and the Environment* Web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息, 请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

LabVIEW, National Instruments, NI, ni.com, the National Instruments corporate logo, and the Eagle logo are trademarks of National Instruments Corporation. Refer to the *Trademark Information* at ni.com/trademarks for other National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data.