

## COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash    Get Credit    Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



*Bridging the gap between the manufacturer and your legacy test system.*

 1-800-915-6216

 [www.apexwaves.com](http://www.apexwaves.com)

 [sales@apexwaves.com](mailto:sales@apexwaves.com)

*All trademarks, brands, and brand names are the property of their respective owners.*

**Request a Quote**

 **CLICK HERE**

**PXIe-4113**

## SPECIFICATIONS

# PXIe-4113

2-Channel, 10 V, 6 A PXI Programmable Power Supply

This specifications apply to the PXIe-4113.

## Contents

---

Definitions.....	2
Conditions.....	2
Cleaning the Module.....	2
Device Capabilities.....	3
Programming and Measurement Accuracy/Resolution.....	4
Load Regulation.....	4
Voltage Output Speed.....	4
Transient Response and Settling Time.....	5
Ripple and Noise.....	5
Auxiliary Power Input Line Regulation.....	5
Remote Sense.....	5
Protection .....	6
Absolute Maximum Limit.....	6
Isolation.....	6
Power Requirement.....	7
Measurement Timing Characteristics.....	7
Triggers.....	7
Physical Characteristics.....	8
Calibration Interval.....	8
Environment.....	8
Operating Environment.....	9
Storage Environment.....	9
Shock and Vibration.....	9
Compliance and Certifications.....	9
Safety.....	10
Electromagnetic Compatibility.....	10
CE Compliance .....	10
Online Product Certification.....	10
Environmental Management.....	11

# Definitions

---

*Warranted* specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

*Characteristics* describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the expected performance met by a majority of the models.
- *Nominal* specifications describe parameters and attributes that may be useful in operation.

Specifications are *Warranted* unless otherwise noted.

# Conditions

---

Specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature<sup>1</sup> of  $23\text{ °C} \pm 5\text{ °C}$
- Calibration interval of 2 years
- 30 minutes warm-up time
- **niDCPower Power Line Frequency** property or `NIDCPOWER_ATTR_POWER_LINE_FREQUENCY` attribute set to 1 power line cycle (PLC)
- **niDCPower Samples to Average** property or `NIDCPOWER_ATTR_SAMPLES_TO_AVERAGE` attribute set to 300 for optimal 50 Hz and 60 Hz rejection
- If the PXI Express chassis has multiple fan speed settings, fans set to the highest setting

# Cleaning the Module

---

Clean devices and terminal blocks by brushing off light dust with a soft, nonmetallic brush. Remove other contaminants with a soft, lint-free, dampened cloth. Do not use detergent or chemical solvents. The unit must be completely dry and free from contaminants before returning to service.

---

<sup>1</sup> The ambient temperature of a PXI system is defined as the temperature at the chassis fan inlet (air intake).

# Device Capabilities

The PXIe-4113 is a single-quadrant power supply with two output channels that are capable of identical output. Channels are isolated from each other and from chassis ground.

## DC voltage

Voltage range 10 V

Minimum programmable voltage level/limit 0.03 V

## DC current


Current range 6 A

Minimum programmable current level/limit 0.02 A

Output power 60 W/channel

The following figure illustrates the voltage and the current source capabilities of the PXIe-4113.

**Figure 1. PXIe-4113 Quadrant Diagram**

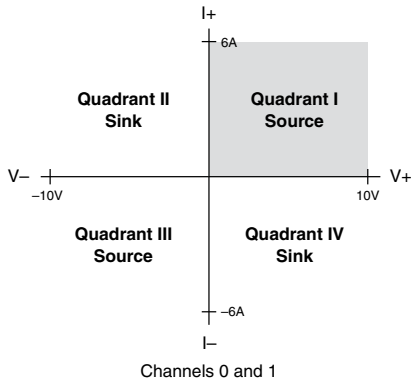

# Programming and Measurement Accuracy/Resolution

**Table 1.** Programming and Measurement Accuracy/Resolution

Specification	Resolution	Accuracy $\pm$ (% of output + offset), $T_{cal} \pm 5 \text{ }^\circ\text{C}^4$	Temperature Coefficient/ $^\circ\text{C}$ , outside $T_{cal} \pm 5 \text{ }^\circ\text{C}$
Voltage programming	0.32 mV <sup>2</sup>	0.1% + 15 mV	0.004% + 0.1 mV
Voltage measurement	3 mV <sup>3</sup>	0.1% + 15 mV	0.004% + 0.25 mV
Current programming	0.19 mA <sup>2</sup>	0.15% + 20 mA	0.015% + 0.14 mA
Current measurement	2 mA <sup>3</sup>	0.15% + 20 mA	0.015% + 0.21 mA

## Load Regulation

Voltage (per amp of output load) 0.5 mV

Current (per volt of output change) 0.25 mA



**Note** Voltage load regulation is measured at the output channel terminals with the device configured for local sense.

## Voltage Output Speed

Rise time (measured from 10% to 90% of programmed voltage change from 0.03 V to 10 V with specified load)

Full resistive load (1.67  $\Omega$ ). <10 ms, typical

No load <10 ms, typical

Fall time (measured from 90% to 10% of programmed voltage change from 10 V to 0.03 V with specified load)

Full resistive load (1.67  $\Omega$ ) <10 ms, typical

No load <10 ms, typical

<sup>2</sup> Based on 16-bit DAC after calibration.

<sup>3</sup> Based on 14-bit ADC with sign bit after calibration.

<sup>4</sup>  $T_{cal}$  is the internal device temperature recorded by the PXIe-4113 at the completion of the last external calibration.

# Transient Response and Settling Time

---

Transient response	<200 $\mu\text{s}$ to recover within 100 mV of voltage level after a load current change from 50% to 100% of current range, typical
--------------------	---

---

## Settling time

Rise time (time to settle within 0.1% of final programmed voltage level from 0.03 V to 10 V with specified load)

Full resistive load (1.67 $\Omega$ )	25 ms, typical
--------------------------------------	----------------

No load	25 ms, typical
---------	----------------

---

Fall time (time to settle within 0.1% of final programmed voltage level from 10 V to 0.03 V with specified load)

Full resistive load (1.67 $\Omega$ )	25 ms, typical
--------------------------------------	----------------

No load	25 ms, typical
---------	----------------

---

# Ripple and Noise

---

## Voltage<sup>5</sup>

Peak-to-peak	<18 mV, typical
--------------	-----------------

RMS	<3 mV, typical
-----	----------------

---

Current, RMS <sup>6</sup>	<2 mA, typical
---------------------------	----------------

---

# Auxiliary Power Input Line Regulation

---

Line regulation (per volt of change in the auxiliary power input)

Voltage	0.2 mV
---------	--------

Current	0.5 mA
---------	--------

---

# Remote Sense

---

Maximum output lead drop	Up to 1 V drop per lead
--------------------------	-------------------------

Maximum sense lead resistance	Up to 1 $\Omega$ per lead
-------------------------------	---------------------------

---

<sup>5</sup> Noise is measured from 20 Hz to 20 MHz at output voltages of 0.2 V to 10 V.

<sup>6</sup> Noise bandwidth is limited to 10 kHz, and is measured at 20 mA into a 500  $\Omega$  load.

# Protection

---

## Output channel protection

Overcurrent or reverse voltage	Reverse clamp diode, protected by thermal overload circuit
Overtemperature	Automatic shutdown

## Auxiliary power input protection

Overvoltage, typical	>52.8 VDC shut-off
Overcurrent or reverse voltage	Fused

# Absolute Maximum Limit

---



**Note** Applying levels beyond the ratings specified in this section can result in permanent damage to the device.



**Note** Connect only voltages that are within these limits.

Voltage from auxiliary power + to earth ground	60 VDC
Voltage from auxiliary power - to earth ground	1 VDC

# Isolation

---

## Isolation voltage, channels 0- and 1-to-earth ground<sup>7</sup>

Continuous	150 VDC, CAT I
Withstand	1,000 V <sub>RMS</sub>



**Caution** Do not connect to MAINS. Do not connect to signals or use for the measurements within CAT II, III, or IV.



**Note** Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.



**Hazardous Voltage** Take precautions to avoid electrical shock when operating this product at hazardous voltages.

---

<sup>7</sup> Verified with a 5-second dielectric withstand test.



**Note** Isolation voltage ratings apply to the voltage measured between any channel pin and the chassis ground pins of the front panel. When operating channels in series or floating on top of external voltage references, ensure that no terminal exceeds this rating.

## Power Requirement

PXI power requirement	0.5 A from 3.3 V rail, 0.25 A from 12 V rail
Auxiliary power source input requirements	45.6 VDC to 50.4 VDC, 3.5 A max

## Measurement Timing Characteristics

Measurement rate	
Default	60/s (Line frequency set to 60 Hz, aperture set to 1 PLC, measure record mode), nominal
Maximum	5,250/s, nominal

## Triggers

Input triggers	
Types	Start, Source, Sequence Advance, Measure
Sources (PXI trigger lines 0 to 7) <sup>8</sup>	
Polarity	Configurable
Minimum pulse width	100 ns, nominal
Destinations <sup>9</sup> (PXI trigger lines 0 to 7) <sup>8</sup>	
Polarity	Active high (not configurable)
Minimum pulse width	200 ns, nominal
Output triggers (events)	
Types	Source Complete, Sequence Iteration Complete, Sequence Engine Done, Measure Complete

<sup>8</sup> Pulse widths and logic levels are compliant with *PXI Express Hardware Specification Revision 1.0 ECN 1*.

<sup>9</sup> Input triggers can come from any source (PXI trigger or software trigger) and be exported to any PXI trigger line. This allows for easier multi-board synchronization regardless of the trigger source.



## Destinations (PXI trigger lines 0 to 7)<sup>8</sup>

Polarity	Configurable
Pulse width	Configurable between 250 ns and 1.6 $\mu$ s, nominal

## Physical Characteristics

Dimensions	3U, one-slot, PXI Express/cPCI Express module; 2.0 cm $\times$ 13.0 cm $\times$ 21.6 cm (0.8 in. $\times$ 5.1 in. $\times$ 8.5 in.), nominal
Weight	443 g, nominal
User-replaceable fuse, auxiliary power input (PCB-mount)	F 6.3 A H 250 V (5 $\times$ 20 mm ceramic fuse)



**Note** NI recommends the Littelfuse 021606.3MXP fuse.

### Front panel connectors

Output channels	Phoenix Contact, 5.08 mm (10 position)
Auxiliary power input	Weidmuller, 3.5 mm (2 $\times$ 2 position)



**Note** I/O connectors can accept wire gauges from 12 AWG to 24 AWG. NI recommends 14 AWG or smaller.



**Note** The PXIe-4113 ships with four sense jumpers installed on the output connector. The sense jumpers connect the sense terminals to their respective output terminals.

## Calibration Interval

Recommended calibration interval	2 years
----------------------------------	---------

## Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

## Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

## Storage Environment

Ambient temperature range	-40 °C to 70 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

## Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random vibration	
Operating	5 Hz to 500 Hz, 0.3 g <sub>rms</sub> (Tested in accordance with IEC 60068-2-64.)
Nonoperating	5 Hz to 500 Hz, 2.4 g <sub>rms</sub> (Tested in accordance with IEC 60068-2-64. Test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

## Compliance and Certifications



**Caution** You can impair the protection provided by the PXIe-4113 if you use it in a manner not described in this document.



**Caution** The auxiliary power input port is sensitive to electrostatic discharge (ESD). When subjected to ESD during normal operation, a fault might result that requires user intervention to recover to normal operation. To ensure proper operation, make all I/O connections before attempting to use the device. In addition, take care to prevent ESD to the auxiliary power input port during normal operation.

## Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

## Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

## Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit [ni.com/](http://ni.com/)

*certification*, search by model number or product line, and click the appropriate link in the Certification column.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at [ni.com/environment](http://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](http://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2013—2018 National Instruments. All rights reserved.

375984F-01 February 12, 2018